

TECHNICAL DATA

Fluke 317/319 Clamp Meters



Key features

The two models are economic, compact and offer a range of special features:


- Unique 40A high-precision low current measurement--0.01A high-resolution, 1.6% high-precision measurement
- The clamps are slim, lightweight, and portable, making them ideal for use in small, confined spaces
- The large backlight display facilitates readings in dark environments
- Starting current (inrush) functionality (319) allows measurement of the starting current of electrical and lighting equipment, for example. (319)
- Current frequency measurement
- Precision down to 0.01A and 0.1V
- 1000A/600A AC/DC current measurement (319/317)
- 600V AC/DC voltage measurement
- 4000 Ω resistance measurement
- Continuity beeper
- Auto off function enhances battery life, meaning the instrument can work when you need it screen store 'hold' function for capturing a measurement result on the screen
- One year warranty

Product overview: Fluke 317/319 Clamp Meters

The Fluke 317 and 319 are designed with ergonomic concepts, shaped to fit your hand and to access tight spots easily. These small and rugged clamp meters are ideally suited for current measurements up to 1000 A (319) in tight cable compartments. The Fluke 317 and 319 also offer AC/DC current measurements and has a higher resolution for loads below 40 A. In addition to a compact package with a strong feature set, the Fluke 319 also equip with In-rush current and Frequency functions for testing motors, lighting, etc.

Specifications: Fluke 317/319 Clamp Meters

Ordering information

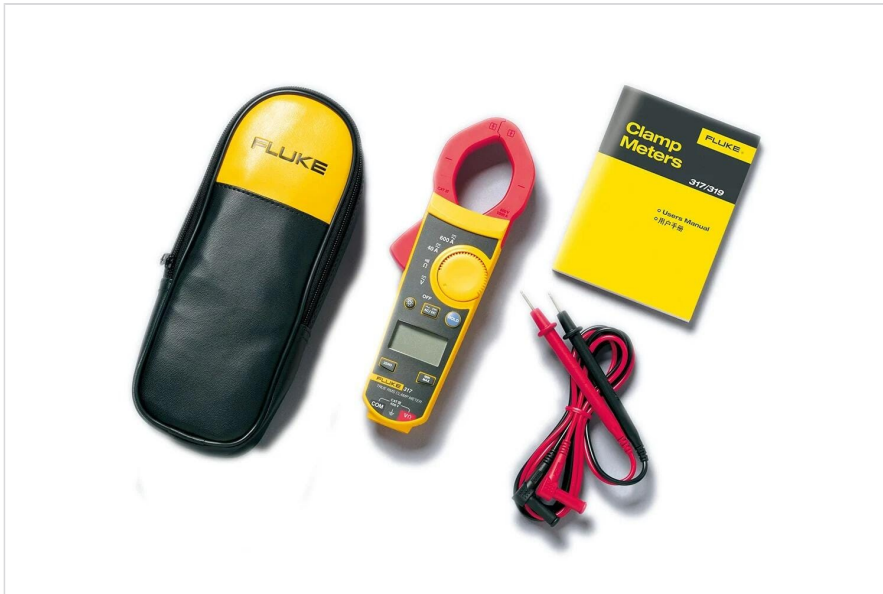

Fluke 317/319

The Fluke 317 and 319 are designed with ergonomic concepts, shaped to fit your hand and to access tight spots easily.

The Meter ships with:

- Test Leads
- Soft Carrying Case
- Three AAA batteries (Installed)
- 317/319 User Manual

These small and rugged clamp meters are ideally suited for current measurements up to 1000 A (319) in tight cable compartments. The Fluke 317 and 319 also offer AC/DC current measurements and has a higher resolution for loads below 40 A. In addition to a compact package with a strong feature set, the Fluke 319 also equip with In-rush current and Frequency functions for testing motors, lighting, etc

Fluke. *Keeping your world up and running.®*

Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:

In the U.S.A. (800) 443-5853

In Europe/M-East/Africa

+31 (0)40 267 5100

In Canada (905) 890-7600

From other countries +1 (425) 446-5500

Representative office of Fluke South East Asia Pte Ltd

C/O Danaher Vietnam

Green Power Tower, 11th Floor Unit 2

35 Ton Duch Thang Street, District 1

Ho Chi Minh City

Vietnam

Tel: +84-8-2220-5371 (ext 103)

Email: info.asean@fluke.com

www.fluke.com/vn-vi

©2025 Fluke Corporation. Specifications subject to change without notice.

08/2025

Modification of this document is not permitted without written permission from Fluke Corporation.