

TM-508A Milliohm Meter




Display

- 3 1/2 digits LCD display with max. Reading of 2000.
- Low battery indication : "  "

Functions

- Battery or AC/DC adapter.
- External knob for zero adjustment.
- Very low impedance measurement by four wire type one pair coated clip.
- Wide measurement range, 0.1mΩ to 20kΩ in 6 manual ranges.
- D-H switch lockup the for LCD display readings.
- Fuse specification : 0.5A/250V , 5x20mm, fast Min.
- Interrupt ratings 1500A.
- Dimension: 160x100x52mm(LxWxH).
- Weight : About 500g.

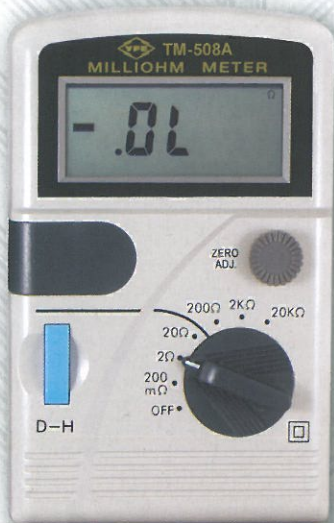

Applications

- Utility area : measurement of secondary transformer winding; measurement of division switch for sufficient low- ohm value.
- Manufactures or users of relays and protective device.
- Manufacturers of switches buttons, contact material.

Range	Accuracy	Resolution	Testing Current	Open-terminal voltage
200mΩ	±(0.3%+4d)	0.1mΩ	100mA	Approx. 4.8VDC
2Ω		1mΩ	10mA	
20Ω		10mΩ	10mA	
200Ω		0.1Ω	1mA	
2kΩ		1Ω	1mA	
20kΩ		10Ω	100mA	